


## HMP-ALU-AG Sub Channel System - Introduction



- Sub channel system with extruded vertical aluminium **HMP-ALU-B** & horizontal **HMP-ALU-R** channels with stainless steel **HCRS4-AL** supports
- Fast and easy installation
- Quick adjustability along the horizontal axis
- Projection sizes minimum 80 mm maximum 360 mm
- **HM-AG** aluminium brackets are used for fixing with the hang on method
- Installation at horizontal & vertical joints

**HMP-ALU-B** Channel

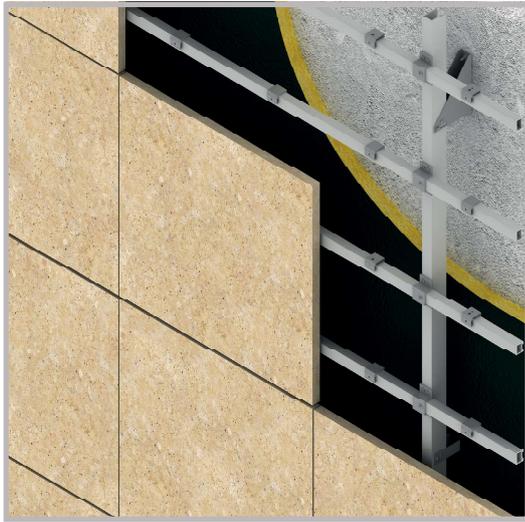

**HMP-ALU-R** Channel



**HCSP4-AL** Channel Support






**HCRS4-AL** Channel Restraint




**HCC-ALU-J** Channel Connection




**HM-AG** Agraffe Bracket

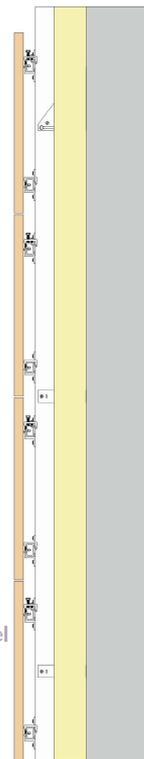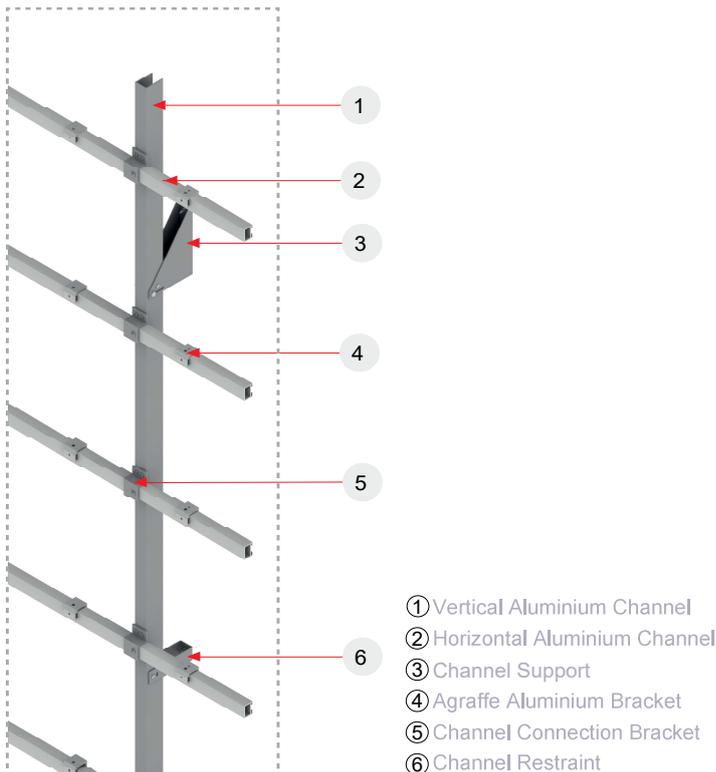

Vertical channels are supported on to load bearing beams with **HCSP4-AL** channel supports using expansion bolts



Horizontal channels are fixed on to the vertical channels with **HCC** channel connections.



Channels are restrained on to walls with **HCRS4-AL** Channel restraints to eliminate deflection