

HMP-ALU-SP Sub Channel System - Introduction



- Sub channel system with extruded aluminium **HMP-ALU-SP** slot channels and stainless steel **HCRS3-AL** supports
- Fast and easy installation
- Quick adjustability along the vertical axis
- Projection sizes minimum 80 mm maximum 250 mm
- **HZ02-SP** stainless steel brackets are used to fix stone panels with self tabbing screws
- Installation at horizontal & vertical joints

HMP-ALU-SP Channel




HCSP6-AL Channel support




HCRS6-AL Channel restraint



HZ02-SP Speedfix Z anchor

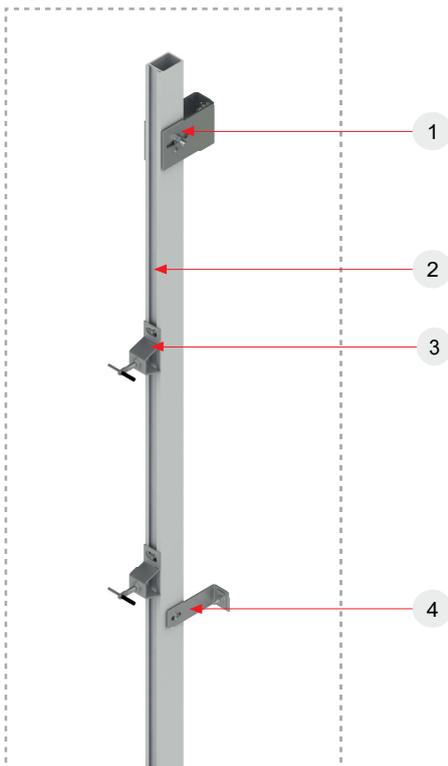

- ① Channel Support
- ② Aluminium C Channel
- ③ Speedfix Anchor
- ④ Channel Restraint

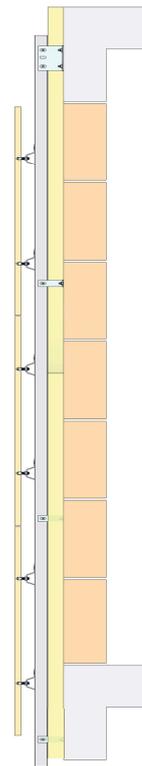

HMP-ALU-R Aluminium Slot Channels supported on to load bearing concrete beams with **HCSP6-AL** channel supports using anchor bolts

Stone installation is made with **HZ02-SP** Anchors on to channels with hex bolts

Channels are tied on to walls with **HCRS6-AL** Channel restraints to eliminate deflection