

HAZ Restraint Brackets - Product Details

HAZ 21 Restraint Bracket


HAZ 21 bracket is used for restraining hand set stone on to concrete or solid block work.

The design enables to fixing through the insulation without the need for excessive cutting and damage to the insulation.


The wall is drilled with a diameter 10 mm hole where the HAZ 21 is fitted into the hole and then tightened to achieve a secure connection.

The use of the correct type is decided whether the walls are insulated and the size of the cavity.


The brackets come pre-assembled and are available in three types, all in stainless steel.

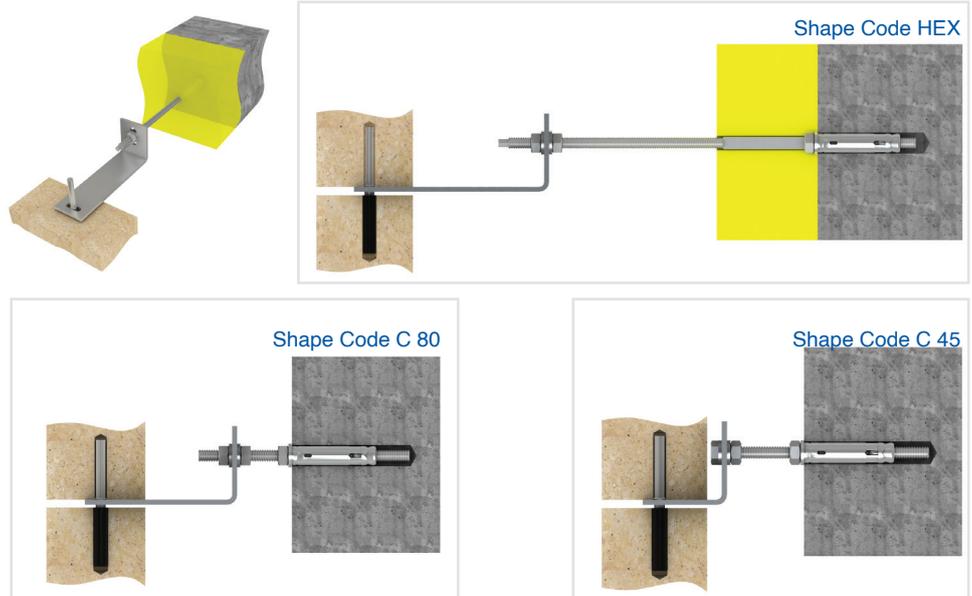


Shape Code C 45



Shape Code HEX



Shape Code C 80



HAZanchor21 RANGE - ADJUSTABLE RESTRAINT FOR STONE CLADDING SUPPLIED FULLY ASSEMBLED READY FOR USE								
SHAPE CODE	ORDER CODE				ADJUSTMENT		CAVITY RANGE	
	S	C	i	S	+	-	Max	Min
C45	S40/C45/i0	S50/C45/i0	S75/C45/i0	S100/C45/i0	16	20	61	25
C80	S40/C80/i0	S50/C80/i0	S75/C80/i0	S100/C80/i0	19	19	99	61
HEX	S40/C107/i60	S50/C107/i60	S75/C107/i60	S100/C107/i60	8	8	115	99
HEX	S40/C131/i60	S50/C131/i60	S75/C131/i60	S100/C131/i60	16	16	147	115
HEX	S40/C179/i60	S50/C179/i60	S75/C179/i60	S100/C179/i60	32	32	211	147
HEX	S40/C110/i80	S50/C110/i80	S75/C110/i80	S100/C110/i80	5	0	112	107
HEX	S40/C118/i80	S50/C118/i80	S75/C118/i80	S100/C118/i80	5	5	123	113
HEX	S40/C134/i80	S50/C134/i80	S75/C134/i80	S100/C134/i80	10	10	144	124
HEX	S40/C166/i80	S50/C166/i80	S75/C166/i80	S100/C166/i80	21	21	187	145
HEX	S40/C200/i80	S50/C200/i80	S75/C200/i80	S100/C200/i80	32	32	232	168

Other sizes available to order

Simply specify S C and i order code required. See below.

KEY TO ORDER CODE:-

S C i

Insulation thickness Max

Cavity width Average

Stone thickness

HAZ 3H Restraint Bracket

3 Hole Restraint Cramp	
Product Code	Length
3H/60	60
3H/75	75
3H/100	100
3H/125	125
3H/150	150
3H/175	175
3H/200	200
3H/225	225
3H/250	250

Other Lengths Available to Order